



MarineSeries

Item No. _____
 Project _____
 Quantity _____

Electric, Two-Pan Marine Deck Ovens

Model: D054B[1,2,3]M & D054R[1,2,3]M



Model D054B3M shown

PAN & PRODUCTION CAPACITY GUIDE

| [B] Bake Series Models: | 18" x 26" Full-Sheet | Pies - 9 | Bread - 1-lb. Loaves |
|--------------------------|----------------------|--------------|----------------------|
| D054BM | 2 | 12 | 20 |
| D054B1M | 2 | 12 | 20 |
| D054B2M | 4 | 24 | 40 |
| D054B3M | 6 | 36 | 60 |
| [R] Roast Series Models: | 18 X 26" Full-Sheet | Meat in lbs. | Whole Turkeys |
| D054RM | 2 | 125 | 4 |
| D054R1M | 2 | 125 | 4 |
| D054R2M | 4 | 250 | 8 |
| D054RM | 6 | 375 | 12 |

MARINE SHORT/BID SPECIFICATION

[BAKE] Deck Oven[s] shall be **LANG Manufacturing Model D054B__ [Insert 1, 2, 3 OR D054BM]M**, a 6-kW [each] electric heated two-pan bake oven, with: 8" high cooking compartment; full-width, spring loaded pull-down door, with double-pane tempered glass viewing window; all stainless steel exterior; insulated, aluminized steel oven interior with top and bottom mounted Incoloy-sheathed heating elements; one heavy duty pan rack standard; stainless steel bolt down legs [except D054BM Model].

(Short/Bid Specification continued on next column)

MARINE PRODUCT WARRANTY

One year, parts & labor (Labor in U.S. only)



MARINE SHORT/BID SPECIFICATION

[ROAST] Deck Oven[s] shall be **LANG Manufacturing Model D054R__ [Insert 1, 2, 3 OR D054RM] M**, a 6-kW [each] electric heated two-pan roast oven, with: 12" high oven interior; full-width, spring loaded pull-down door, with double-pane tempered glass viewing window; all stainless steel exterior; insulated, aluminized steel oven interior with top and bottom mounted Incoloy sheathed heating elements; one heavy duty pan rack standard; stainless steel angular legs [except D054RM Model].

MARINE CONSTRUCTION FEATURES [Each oven]

- Heavy duty 430 Series stainless steel exterior
- Aluminized steel oven interior fully insulated on six sides
- Heavy duty spring-loaded pull-down door with latching handle
- Double pane tempered glass viewing window
- Interior lighting
- Recessed, right side mounted control panel
- 27" [Single Deck], 16" [Double Deck] or 6" high [Triple Deck] stainless bolt down legs standard
- One heavy duty wire rack provided, per oven/deck

PERFORMANCE FEATURES

- Hatchable modular design allows movement through 26" X 66" watertight hatch
- Top & bottom mounted heating elements enclosed in Incoloy sheathing
- Stackable up to three high, for more capacity in same footprint
- A 12" high cooking compartment for preparing turkeys and larger roasts [Two-Pan Roast Models-D054R1M, D054R2M, D054R3M and D054RM]
- Sturdy pull-down door serves as loading platform
- 150-550°F operating temperature range

CONTROL PACKAGE [Per deck]

- Recessed control panel, in the cool zone
- 150-550°F thermostat temperature control
- 3-heat switch for: top only, bottom only or top & bottom heat
- 60 minute timer with loud buzzer
- Manual vent and damper control
- Interior light switch




Electric, Two-Pan Marine Deck Ovens Model: D054B[1,2,3]M & D054R[1,2,3]M

MARINE INSTALLATION REQUIREMENTS

- ② 208V or 240V, 1-Phase or 3-Phase power required; or standard 440V/480V, 3-Phase
- Consult marine codes for installation requirements
- Multi-deck ovens ship separate [For movement through watertight hatch] Assembly hardware provided.
- [Power connection from bottom. See below]

MARINE OPTIONS & ACCESSORIES

- Solid stainless steel door [no window], per oven deck
- Extra wire pan racks [one provided as std., per oven/deck]

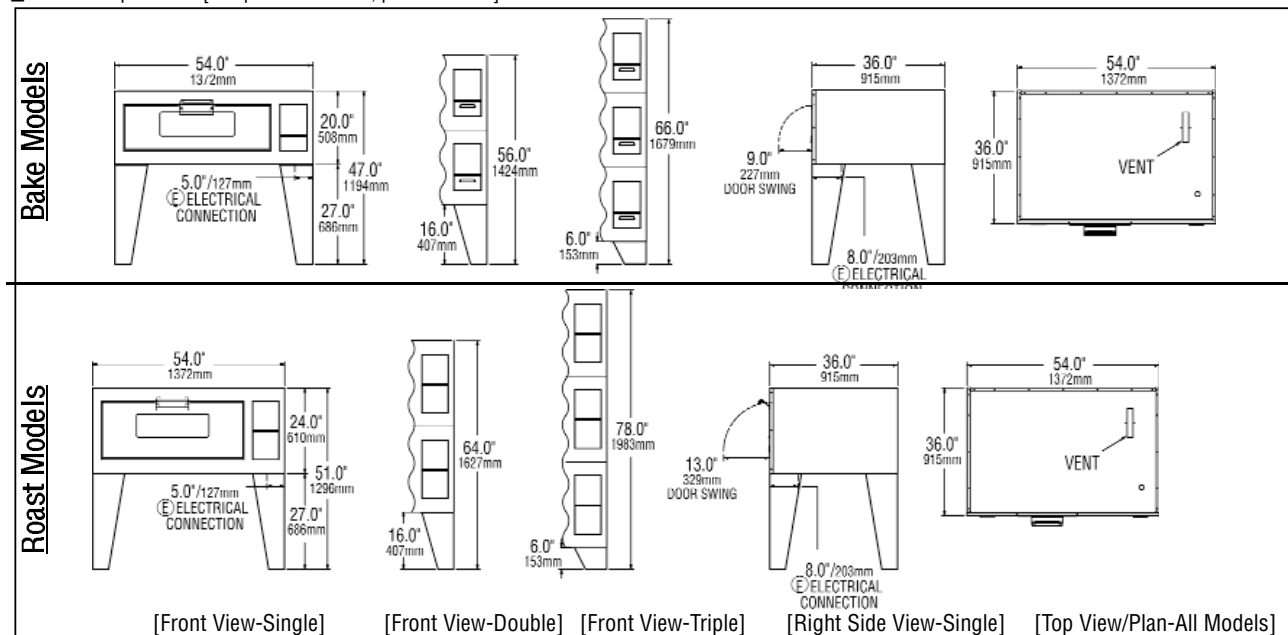

| Model | External Height x Width x Depth (without legs) | | Clearance from combustible surface* | Weight | | Freight Class |
|---------|--|-------------------------|---|------------------|------------------|---------------|
| | Actual | Shipping | | Actual | Shipping | |
| D054BM | 20.0" x 54.0" x 36.0" | 508mm x 1372mm x 915mm | Sides: 2.0" (51mm) Back: 2.0" (51mm) | 330lbs., 150 kg | 380 lbs., 173 kg | 70 |
| D054RM | 24.0" x 54.0" x 36.0" | 610mm x 1372mm x 915mm | | 355lbs., 161kg | 405 lbs., 184 kg | 70 |
| D054B1M | 20.0" x 54.0" x 36.0" | 508mm x 1372mm x 915mm | | 380lbs., 173 kg | 430 lbs., 195 kg | 70 |
| D054R1M | 24.0" x 54.0" x 36.0" | 610mm x 1372mm x 915mm | | 405lbs., 184 kg | 455 lbs., 207 kg | 70 |
| D054B2M | 40.0" x 54.0" x 36.0" | 1016mm x 1372mm x 915mm | | 735lbs., 334 kg | 785 lbs., 357 kg | 70 |
| D054R2M | 48.0" x 54.0" x 36.0" | 1219mm x 1372mm x 915mm | | 785lbs., 357 kg | 835 lbs., 380 kg | 70 |
| D054B3M | 60.0" x 54.0" x 36.0" | 1524mm x 1372mm x 915mm | | 1115lbs., 507 kg | 1165lbs., 530 kg | 70 |
| D054R3M | 72.0" x 54.0" x 36.0" | 1829mm x 1372mm x 915mm | | 1190lbs., 541 kg | 1240lbs., 564 kg | 70 |

* Noncombustible floor only.

| Model | Volts AC - Hz | Total kW | Amps - Three Phase | Amps - Single Phase |
|---------------------------|---------------|----------|--------------------|---------------------|
| D054[B,R]M D054[B,R]1M | 208 - 50/60 | 6.0 | N/A | 28.9 |
| | 240 - 50/60 | 6.0 | N/A | 25.0 |
| | 440 - 50/60 | 5.0 | N/A | 11.5 |
| | 480 - 50/60 | 6.0 | N/A | 12.6 |
| D054[B,R]2M | 208 - 50/60 | 12.0 | 50.0 | 57.7 |
| | 240 - 50/60 | 12.0 | 43.3 | 50.0 |
| | 440 - 50/60 | 10.1 | 19.9 | N/A |
| | 480 - 50/60 | 12.0 | 21.7 | N/A |
| D054[B,R]3M | 208 - 50/60 | 18.0 | 50.0 | 86.5 |
| | 240 - 50/60 | 18.0 | 43.3 | 75.0 |
| | 440 - 50/60 | 15.1 | 19.9 | N/A |
| | 480 - 50/60 | 18.0 | 21.7 | N/A |

Due to continuous improvements, specifications subject to change without notice.



Sheet No. LMSP-D2 (rev. 07/07)

LANG MANUFACTURING - A DIVISION OF STAR MANUFACTURING INT'L, INC. • 10 SUNNEN DR. ST. LOUIS, MO 63143
TOLL FREE: 800.264-7827 • FAX: 314-781-3636 • www.langworld.com