

## UB-6T Tabletop Oven



### SIZE:

**UB-6T** - 50" High, 32" Wide, 34-3/8" Deep  
1270 mm High, 813 mm Wide, 873 mm Deep

**NU-VU's UB-6T** is a Tabletop oven with a capacity of either six 18"x26" full-size pans or twelve 13"x18" half-size pans. The unique **V-AIR®** design results in faster cook times and perfect heat distribution top to bottom, side-to-side and front to back. You'll never need to turn pans. Stainless steel construction provides a heavy-duty long life oven. Solid-state controls are accurate and durable. The tempered glass, flush mounted door will not sag over time. It provides a full view of product and has lift off hinges for easy cleaning.

### CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and side of unit
- Heating elements accessible inside of cabinet and through side

### CONTROLS:

- Solid state controls
- Indicator light for thermostat
- Four speed fan switch
- Microswitch fan motor cut-off

### STANDARD FEATURES:

- **V-AIR®** technology
- Stainless steel construction
- Stainless steel legs (6")
- Full view tempered glass door
- Silicone rubber door gaskets
- Flush mount, lift off, no sag door
- Steam vent


### OPTIONAL FEATURES:

- Internal steam
- Cook'n Hold
- Solid door
- Two speed fan
- Large vent
- Cart with panslides

### LABORATORY CERTIFICATION AND APPROVAL




**NU-VU® UB-6T Tabletop Oven**



Approval / Stamp

## UB-6T Tabletop Oven

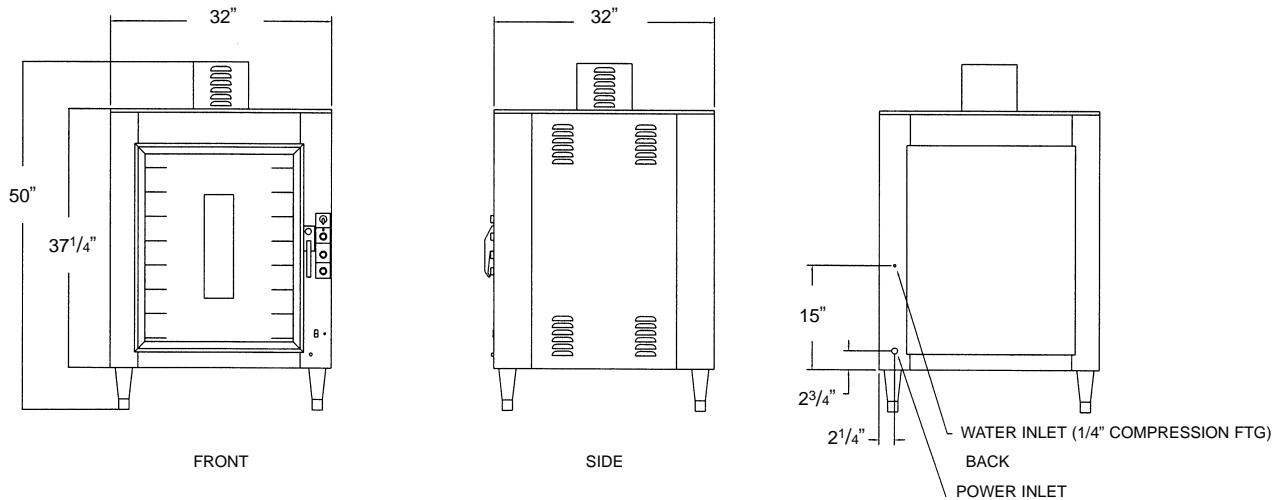

### SPECIFICATIONS:

#### ELECTRICAL:

208 or 240 Volt single or three phase is standard.  
(Specify at time of order.)

#### SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site.  
Single phase uses four-wire system. Three phase uses five-wire system.

### INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

### CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Oven	6	12	4-1/2"

### DIMENSIONS:

	Height	Width	Depth
Exterior	50"	32"	34-3/8"
Interior	28-1/2"	18-1/4"	28-1/4"

### ELECTRICAL:

Amp Draw	120/208/1	120/208/3	120/240/1	120/240/3
L1	45	27	39	22
L2	41	35	35	31
L3	n/a	20	n/a	18

### WATER:

A 1/4" waterline is required if a steam option is selected.  
A water conditioning system should be used to minimize mineral build-up.

**DOOR SWING:** Oven - 24-1/4" (616 mm)

### PACKING SIZE:

52" High, 42" Wide, 42" Deep  
(1321 mm High, 1067 mm Wide, 1067 mm Deep)

### SHIPPING WEIGHT:

400 Pounds (181 Kg), FOB Menominee, MI 49858

### LISTINGS:

The UB-6T has NSF & ETL listings.



**NU-VU® Food Service Systems**

www.nu-vu.com  
5600 13th Street  
Menominee, MI 49858

1-800-338-9886 Toll Free  
1-906-863-4401 Phone  
1-906-863-5889 Fax

**NU-VU® UB-6T Tabletop Oven**